

# 384 SERIES

## MARINE LOCATIONS

DATE: \_\_\_\_\_ PROJECT MGR: \_\_\_\_\_

JOB: \_\_\_\_\_

PN: \_\_\_\_\_

### APPLICATIONS

- Pit Lighting
- Laboratory Applications
- Washdown Areas
- Petrochemical Plants
- Chemical Plants
- Maintenance Pits
- Oil Drilling Rigs
- Machining/Fabricating
- Waste Water Treatment Areas



Meets all Coast Guard specifications. Streamlined design provides eye appeal and ruggedness. Designed to withstand strong vibration. Adjustable mounting brackets and lamps included. Straight in lamp holders.

### SPECIFICATIONS

**LISTINGS:** UL 844: Class I, Div. 2, groups A, B, C and D.  
T4 (135 C) operating code  
UL 1598A: Outdoor marine type (saltwater)



**FEATURES:** Corrosion resistant, low copper content aluminum  
Zinc plated latches are standard  
3/4" hubs  
Neoprene gasket  
Easy access to fluorescent ballast and internal wiring.  
For chemical resistance chart for the 384 Series see page 132.

**LENS:** 1/8" Clear acrylic lens is heat and shatter resistant.  
For vehicular pit areas and other select areas  
LDPI suggests the use of tempered glass lens.  
For machining applications with coolant/cutting fluid:  
LDPI suggests the use of polycarbonate lens.

**MOUNTING:** Versatile mounting arrangements.  
Brackets come standard

**ELECTRICAL:** Available in AC  
Available in 17, 20, 24, 32, 35, 40 and 60 watts  
T8, T12 and T12HO  
Voltages: 120, 220, 240 and 277

**OPTIONS:** ALL OPTIONS ORDERED SEPARATELY  
EM: Emergency battery backup ballast  
120 or 277V - MUST SPECIFY  
1/8" tempered glass lens  
1/8" polycarbonate lens  
Stainless steel latches

### MARINE LOCATIONS



# 384 SERIES

## MARINE LOCATIONS




www.ldpi-inc.com

Series	Watts	Description	Hub	Order #	Voltage
384 2 Lamp 2 Ft.	17	R.S. T8 Electronic Med. Bi-Pin	3/4	384-265-2-A	120V/60HZ
			3/4	384-265-2-B	240V/60HZ
			3/4	384-265-2-C	277V/60HZ
			3/4	384-265-2-D	220V/50HZ
	20	R.S., T12 F20T12, Med. Bi-Pin, 43 mA, 24"	3/4	384-430-2-A	120V/60HZ
			3/4	384-430-2-B	240V/60HZ
			3/4	384-430-2-C	277V/60HZ
			3/4	384-430-2-D	220V/50HZ
	35	R.S., T12 F24T12 H.O., Recessed Double Contact, 800 mA, 24", H.O.	3/4	384-800-2-A	120V/60HZ
			3/4	384-800-2-B	240V/60HZ
			3/4	384-800-2-C	277V/60HZ
			3/4	384-800-2-D	220V/50HZ
384 2 Lamp 4 Ft.	32	R.S., T8 Electronic, F32T8, Med. Bi-Pin, 265 mA, 48"	3/4	384-265-4-A	120V/60HZ
			3/4	384-265-4-B	240V/60HZ
			3/4	384-265-4-C	277V/60HZ
			3/4	384-265-4-D	220V/50HZ
	40	R.S., T12, F40T12, Med. Bi-Pin, 430 mA, 48"	3/4	384-430-4-A	120V/60HZ
			3/4	384-430-4-B	240V/60HZ
			3/4	384-430-4-C	277V/60HZ
			3/4	384-430-4-D	220V/50HZ
	60	R.S., T12, F48T12, Recessed Double Contact, 800 mA, 48" H.O.	3/4	384-800-4-A	120V/60HZ
			3/4	384-800-4-B	240V/60HZ
			3/4	384-800-4-C	277V/60HZ
			3/4	384-800-4-D	220V/50HZ

ADJUSTABLE MOUNTING BRACKETS AND LAMPS INCLUDED  
(Multiple voltages available, consult factory)



### DIMENSIONS (Nominal)

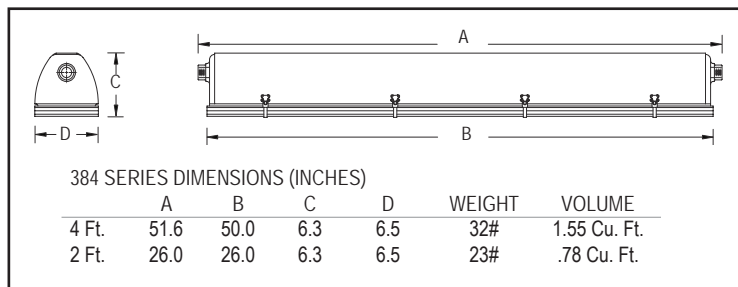

### MOUNTING (STANDARD)

Versatile mounting arrangements, (360 ).  
Brackets come standard

