


••• INSTALLATION INSTRUCTIONS FOR 4 FT. T-8 32 WATT REAR ACCESS SERIES LIGHT FIXTURE •••


Package Contents: (1) Light, and Installation Instructions.

***For Retro Fit Mounting:** Lay out opening cut-out panel (see hole detail)


Check for proper clearances around opening cut-out and on back side of panel. Cut mounting opening in panel.

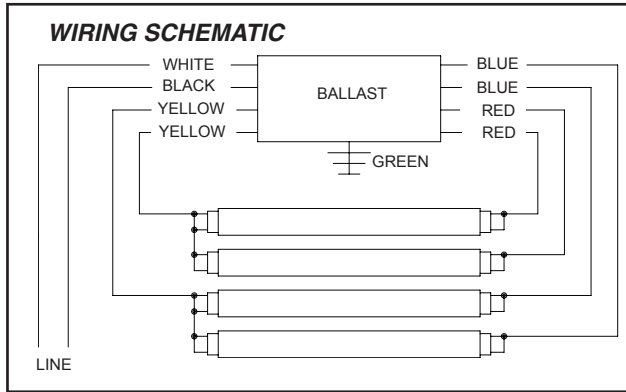

NOTE: REFER TO DIAGRAM ON BALLAST WITH SPECIFIC WIRING DETAILS.

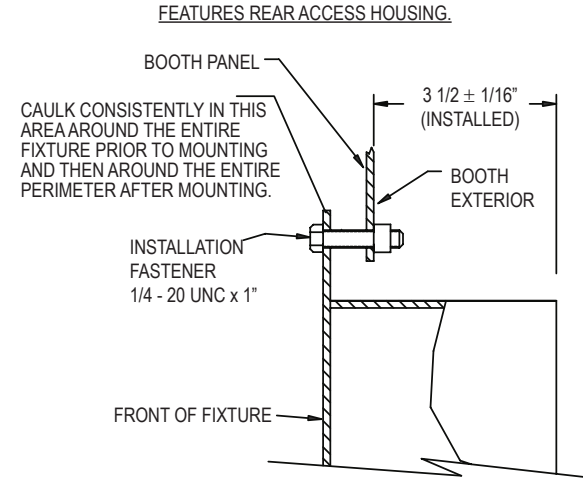

MOUNTING DETAIL

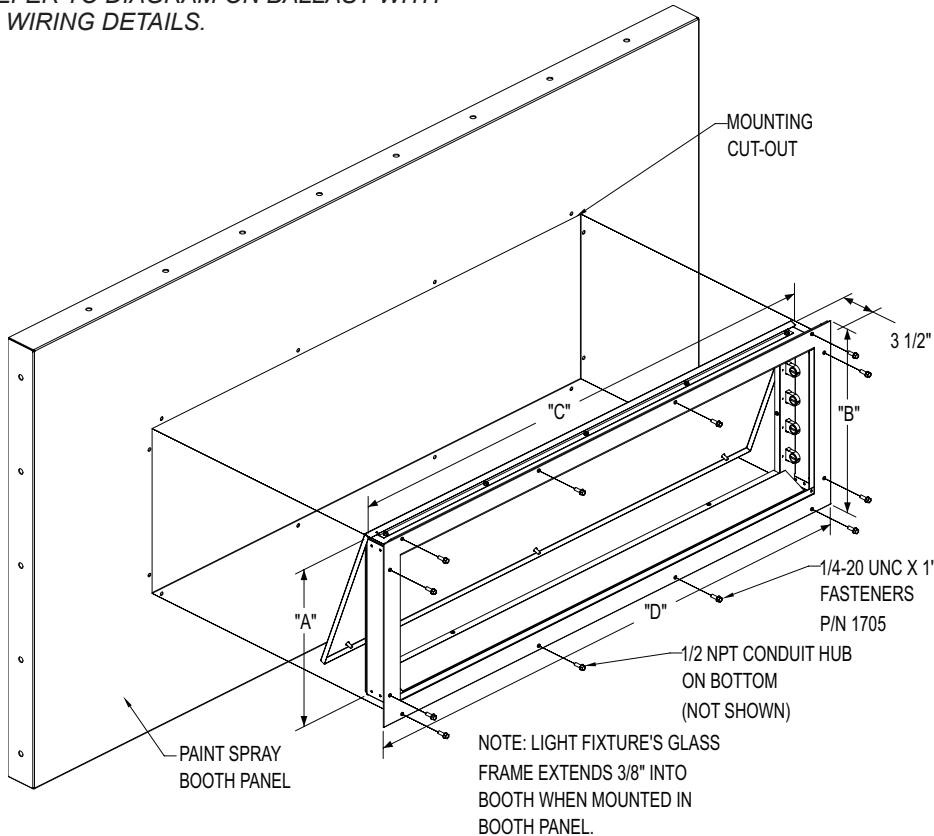

FIXTURE TYPE	MODEL NO.	INPUT AMPS		DIMENSIONS			
		120V	277V	A	B	C	D
4 FT. 2 LAMP	390421	.49	.22	10-1/2"	12 9/16"	50 3/8"	52-3/8"
4 FT. 4 LAMP	390441	.94	.41	15-1/2"	17 9/16"	50 3/8"	52-3/8"
4 FT. 6 LAMP	390461	1.56	.66	20-1/2"	22 9/16"	50 3/8"	52-3/8"

FIXTURES ARE REAR ACCESS


NOTE: LIGHT FIXTURE'S GLASS FRAME EXTENDS 3/8" INTO BOOTH WHEN MOUNTED IN BOOTH PANEL.

INSTALLATION INSTRUCTIONS FOR 4 FT., T-8 32 WATT REAR ACCESS SERIES FLUORESCENT LIGHT FIXTURES FOR PAINT BOOTH APPLICATIONS

1. Mark hole pattern on booth panel where fixture is to be located as shown per customer's applications.
2. Cut opening in booth panel using suitable tools.
3. Place light fixture into opening in booth panel, center, and mark locations of mounting holes. (4 ft. fixtures have 12 mounting holes.)
4. Remove fixture from booth panel and punch the 5/16" dia. mounting holes in panel.
5. Install light fixture into panel from inside of booth as shown. For horizontal mounting, mount with conduit hub on bottom side.
Install mounting fasteners (not provided) and secure to booth panel. Customer is responsible for providing any panel reinforcements needed for mounting.
6. Caulk the flange perimeter with the same type of caulk as the spray booth.
7. Installation of light fixture into booth panel is now complete.

NOTE: When installing lamp -- fixtures are rated for T-8 lamps only.

8. This fixture should be installed by qualified technicians in strict accordance with the National Electrical Code and any local requirements.

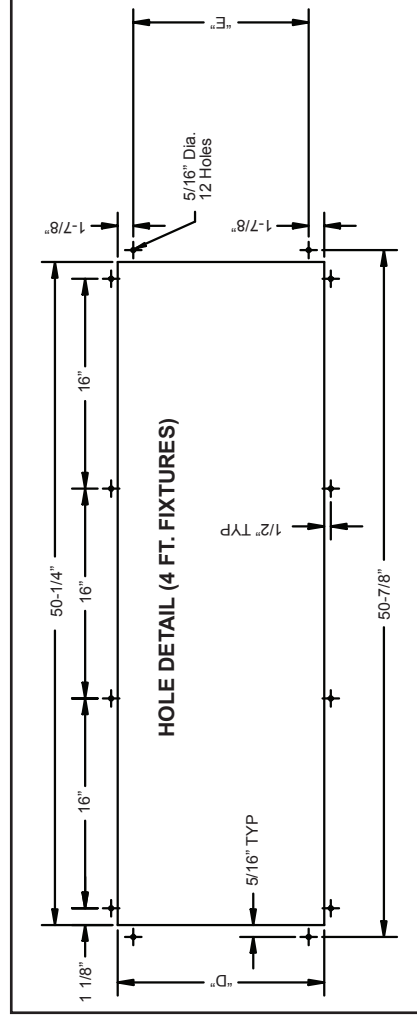

Type	DIMENSIONS	
	"D"	"E"
2 Lamp Fixture.....	10-3/4"	7"
4 Lamp Fixture.....	15-3/4"	12"
6 Lamp Fixture.....	20-3/4"	17"