


XP CART SERIES

EXPLOSION PROOF LIGHT CART

DATE: _____ PROJECT MGR: _____

JOB: _____

PN: _____

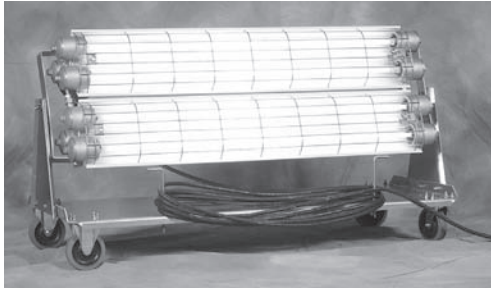

380 Series Cart 4 Lamp

APPLICATIONS

Hazardous Locations
 Paint Inspection Areas
 Laboratory Applications
 Corrosive Environments
 Aircraft Hangars
 Maintenance Pits

Lighting for Explosive Environments - The 380 Portable Light Cart is manufactured in accordance with applicable NFPA standards. For use in hazardous environments and laboratory applications. Portable lighting solutions for hazardous atmospheres. Light can be directed where you need it most. Fixture(s) sold separately. For light fixture specifications - see page 31

SPECIFICATIONS

FIXTURE LISTINGS:

UL listed 844 U.S. and Canada for hazardous locations
 UL listed 1598 U.S. and Canada for wet locations
 UL listed 1598A U.S. and Canada for marine locations



FEATURES:

For either 2, 3 or 4-lamp 4 foot fixture
 5" non-sparking casters (1 pair fixed, 1 pair swivel)
 360 non-continuous adjustable fixture rotation
 Lamps, polycarbonate shield and stainless steel guard: ALL INCLUDED

ELECTRICAL:

Available in 28, 32, 34, 44, 54 and 60 watt with T5, T5HO, T8, T8HO T12 and T12HO lamps
 Voltages: 120
 50 Ft. of S.O. electric cable suitable for rough duty use
 Explosion proof switch
 Explosion proof plug - 120 volt (P/N 3825)

HOUSING:

Frame constructed of corrosion resistant aluminum

REFLECTOR:

One piece aluminum reflector

LENS:


Clear tempered glass tubes, polycarbonate shield.

MOUNTING:

Fixture mounted to 360 (non-continuous) adjustable rotating brackets

OPTIONS:

2 lamp model (P/N 4372-2)
 3 lamp model (P/N 4372-3)
 4 lamp model (P/N 4372-4)

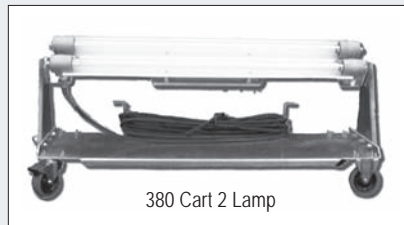

380 Cart 2 Lamp

EXPLOSION PROOF LIGHT CART



XP CART SERIES

EXPLOSION PROOF LIGHT CART



www.ldpi-inc.com

CART	SERIES	LAMP TYPE	LAMP QTY	LENGTH	VOLTAGE	OPTIONS
4372-2: (2 Lamp cart) 4372-3: (3 Lamp cart) 4372-4: (4 Lamp cart)	380	T5** T5HO* T8* T8HO** T12 T12HO	2 3 4	4: 4 Ft.	120: 120 Volts	HB: 93% Reflective specular reflector insert

NOTE:
*5000K lamp standard for T5HO and T8 lamps
**4100K lamp standard for T8HO and T5 lamps
All T5, T5HO & T8 are universal voltage
3 lamp fixtures not available in T8HO or T12HO




LAMP WATTAGES	
4 Ft. Lamp	Wattage
T5	28W
T5 H.O.	54W
T8	32W
T8 H.O.	44W
T12	34W
T12 H.O.	60W

DIMENSIONS


2, 3 and 4 Lamp Cart

- A — 58"
- B — 24"
- C — 24 3/4"
- D — 27 5/8"
- E — 29 9/16"

Note: LDPI* recommends consulting local authorities for approval of your application prior to purchase.

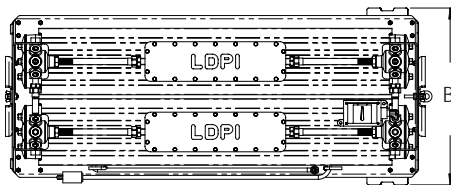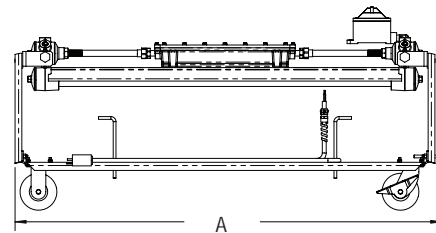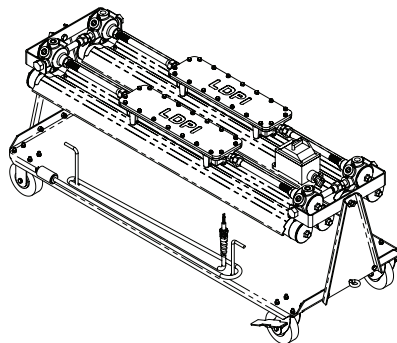

4 LAMP

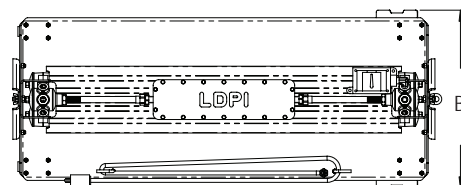

2 LAMP

