



**IES INDOOR REPORT
PHOTOMETRIC FILENAME : 387S100C.IES**

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-1995
[TEST] 20860
[MANUFAC]LDPI - VAPORPROOF - HID CEILING
[LUMCAT]387-S100-C
[LUMINAIRE]WITH CLEAR LINEAR PRISMATIC GLASS JAR LENS AND DIE CAST GUARD
[LAMP]ONE PHILIPS 100 WATT HPS LAMP
[LAMP]C100S54/M. LUMEN RATING = 9500 LMS.
[OTHER]LAMP OPERATING AT 100 WATTS

CHARACTERISTICS

Total Rated Lamp Lumens	9500
Total Luminaire Efficiency	77.5 %
Luminaire Efficacy Rating (LER)	57
Total Luminaire Watts	130
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criteria (0-180)	N.A.
Spacing Criteria (90-270)	N.A.
Spacing Criteria (Diagonal)	N.A.
Basic Luminous Shape	Point
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.00 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 387S100C.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	163.01	1.7	2.2
0-40	463.61	4.9	6.3
0-60	1393.04	14.7	18.9
0-90	3855.8	40.6	52.4
90-120	2605.49	27.4	35.4
90-130	3036.4	32	41.3
90-150	3493.92	36.8	47.5
90-180	3502.33	36.9	47.6
0-180	7358.13	77.5	100

Total Luminaire Efficiency = 77.5%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	7.07
10-20	41.82
20-30	114.13
30-40	300.6
40-50	339.78
50-60	589.65
60-70	808.94
70-80	803.84
80-90	849.98
90-100	935.31
100-110	964.38
110-120	705.79
120-130	430.91
130-140	347.63
140-150	109.89
150-160	7.23
160-170	1.17
170-180	.01


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 387S100C.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	83	83	83	83	77	77	77	77	66	66	66	55	55	55	45	45	45	41
1	71	66	61	57	65	61	56	53	50	47	44	41	39	36	33	31	29	25
2	63	55	48	43	57	50	44	39	41	37	33	33	30	27	26	23	21	17
3	56	47	39	33	51	43	36	31	35	30	25	28	24	20	21	18	15	12
4	51	40	33	27	46	37	30	25	30	25	20	24	20	16	18	15	12	9
5	46	35	28	22	42	32	25	20	26	21	17	21	16	13	16	12	10	7
6	42	31	24	18	38	28	22	17	23	18	14	18	14	11	14	11	8	5
7	39	28	21	16	35	25	19	14	21	16	12	17	12	9	13	9	7	4
8	36	25	18	13	33	23	17	12	19	14	10	15	11	8	11	8	6	4
9	33	23	16	12	30	21	15	11	17	12	9	14	10	7	10	7	5	3
10	31	21	14	10	28	19	13	9	16	11	8	12	9	6	10	6	4	3

POLAR GRAPH

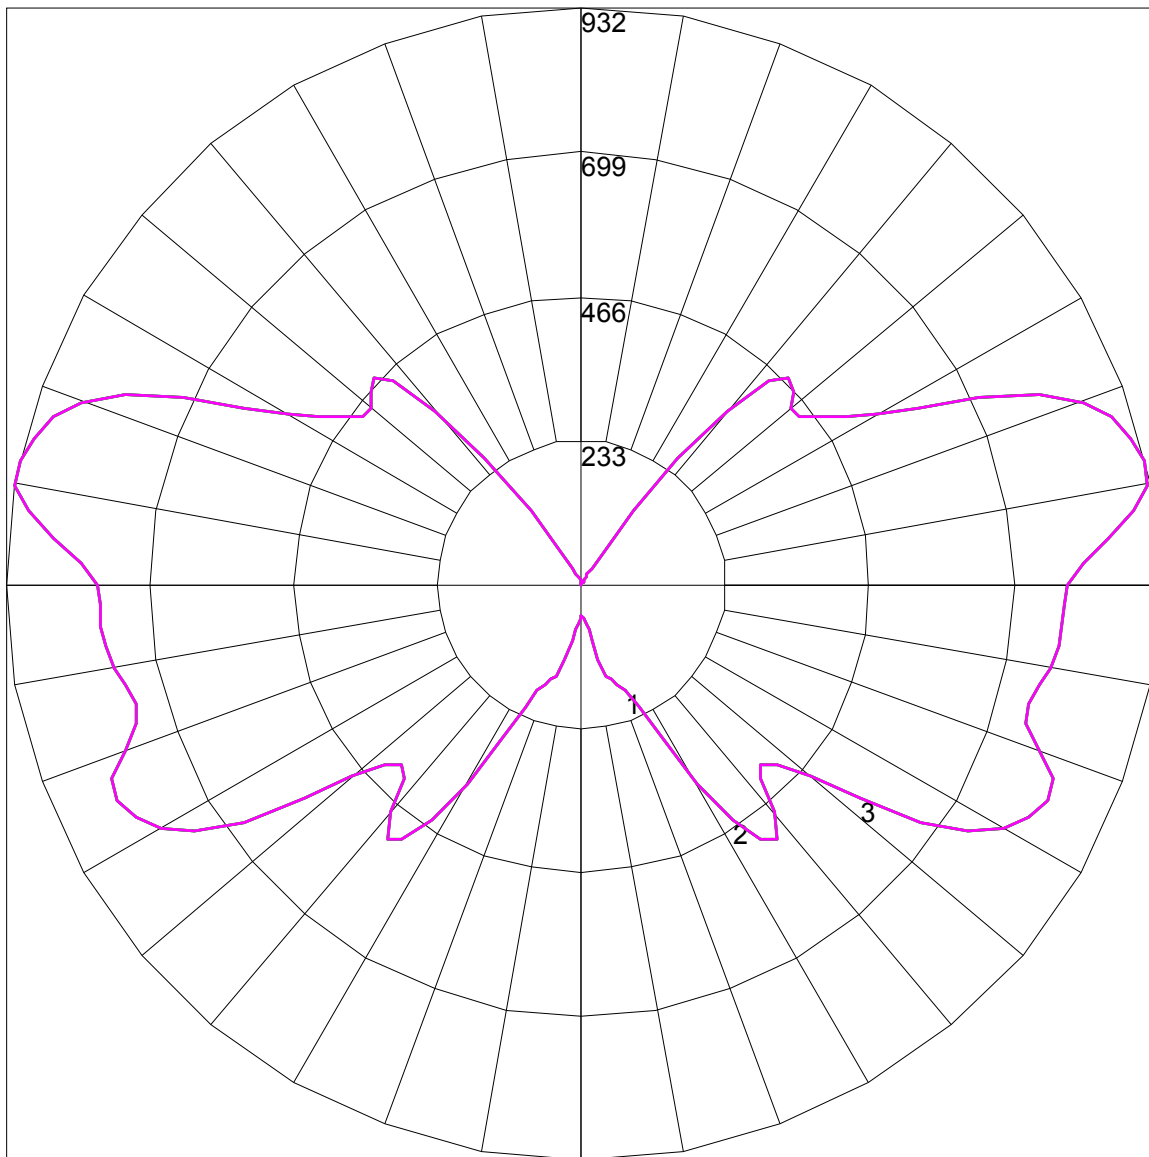

Maximum Candela = 931.8 Located At Horizontal Angle = 0, Vertical Angle = 102.5

- # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
- # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
- # 3 - Vertical Plane Through Horizontal Angles (90 - 270)