



## Photometric Report (Type C)

Filename: HAZ032I.ies

Maximum Candela = 1950 at 0 H 65 V

### Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.14

Luminaire Efficacy Rating (LER): 11690

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 65 Vertical

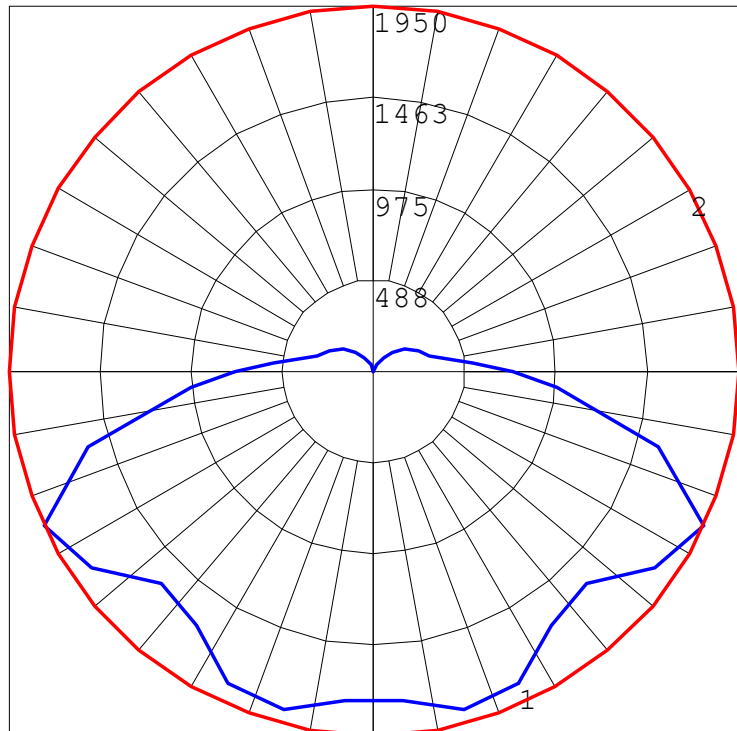



## Photometric Report (Type C)

Filename: HAZ032I.ies

Maximum Candela = 1950 at 0 H 65 V

### Classification:

Road Classification: Type V, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.14

Luminaire Efficacy Rating (LER): 11690

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	541.6	3.9	4.6
FM (30-60)	1778.3	12.7	15.2
FH (60-80)	1807.0	12.9	15.5
FVH (80-90)	928.0	6.6	7.9
BL (0-30)	541.6	3.9	4.6
BM (30-60)	1778.3	12.7	15.2
BH (60-80)	1807.0	12.9	15.5
BVH (80-90)	928.0	6.6	7.9
UL (90-100)	351.0	2.5	3.0
UH (100-180)	1229.4	8.8	10.5
Total	11690.2	83.5	100.0
BUG Rating	B3-U5-G5		

