



Photometric Report (Type C)

Filename: HAZ053I.ies

Maximum Candela = 3350 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Semi-Cutoff (deprecated)

Upward Wast Light Ratio: 0.14

Luminaire Efficacy Rating (LER): 16414

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G4


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 25 Vertical

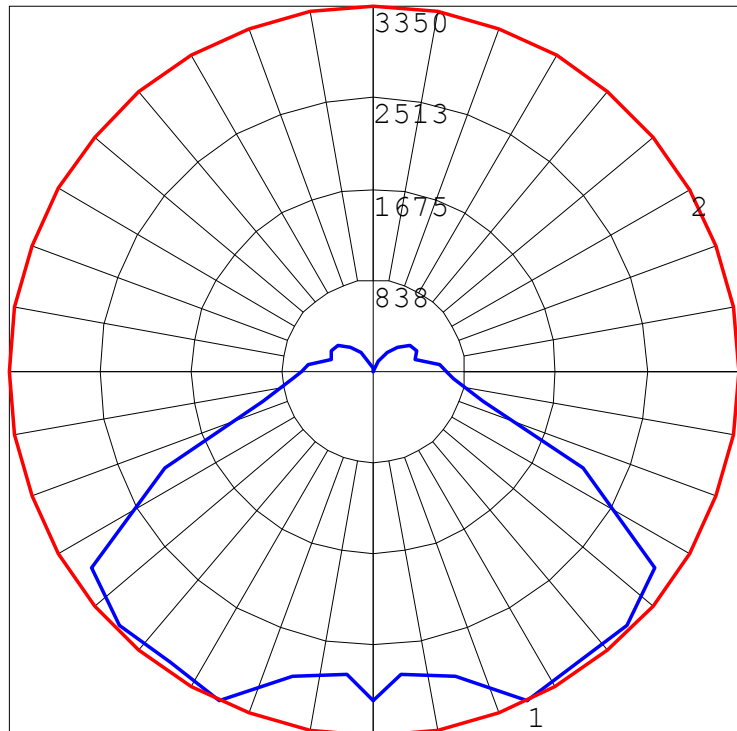



Photometric Report (Type C)

Filename: HAZ053I.ies

Maximum Candela = 3350 at 0 H 25 V

Classification:

Road Classification: Type V, Very Short, Semi-Cutoff (deprecated)

Upward Waste Light Ratio: 0.14

Luminaire Efficacy Rating (LER): 16414

Indoor Classification: Semi-Direct

BUG Rating : B3-U5-G4

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	891.2	4.1	5.4
FM (30-60)	3414.5	15.5	20.8
FH (60-80)	2067.6	9.4	12.6
FVH (80-90)	677.1	3.1	4.1
BL (0-30)	891.2	4.1	5.4
BM (30-60)	3414.5	15.5	20.8
BH (60-80)	2067.6	9.4	12.6
BVH (80-90)	677.1	3.1	4.1
UL (90-100)	348.8	1.6	2.1
UH (100-180)	1964.7	8.9	12.0
Total	16414.3	74.7	100.0
BUG Rating	B3-U5-G4		

