



Photometric Report (Type C)

Filename: HAZ066I.ies

Maximum Candela = 15750 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 20970

Indoor Classification: Direct

BUG Rating : B4-U0-G1


Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

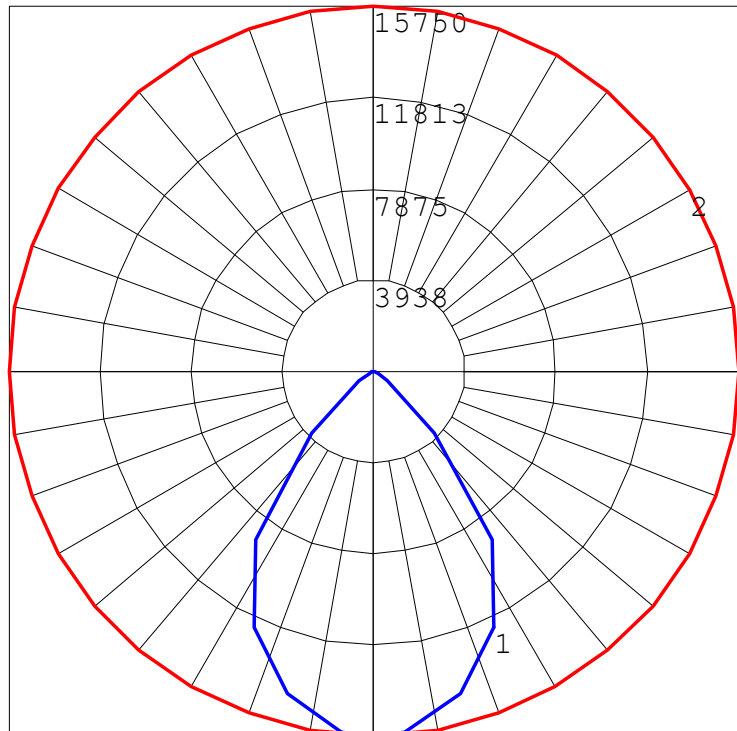



Photometric Report (Type C)

Filename: HAZ066I.ies

Maximum Candela = 15750 at 0 H 0 V

Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Waste Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 20970

Indoor Classification: Direct

BUG Rating : B4-U0-G1

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	4118.0	12.1	19.6
FM (30-60)	6055.6	17.8	28.9
FH (60-80)	292.4	0.9	1.4
FVH (80-90)	18.9	0.1	0.1
BL (0-30)	4118.0	12.1	19.6
BM (30-60)	6055.6	17.8	28.9
BH (60-80)	292.4	0.9	1.4
BVH (80-90)	18.9	0.1	0.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	20969.8	61.8	100.0
BUG Rating	B4-U0-G1		

