



## Photometric Report (Type C)

Filename: HAZ102I.ies

Maximum Candela = 2166 at 90 H 65 V

### Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 6538

Indoor Classification: Semi-Direct

BUG Rating : B2-U5-G4


### Polar Candela Curves:

Vertical Plane Through:

1) 90 - 270 Horizontal

Horizontal Cone Through:

2) 65 Vertical

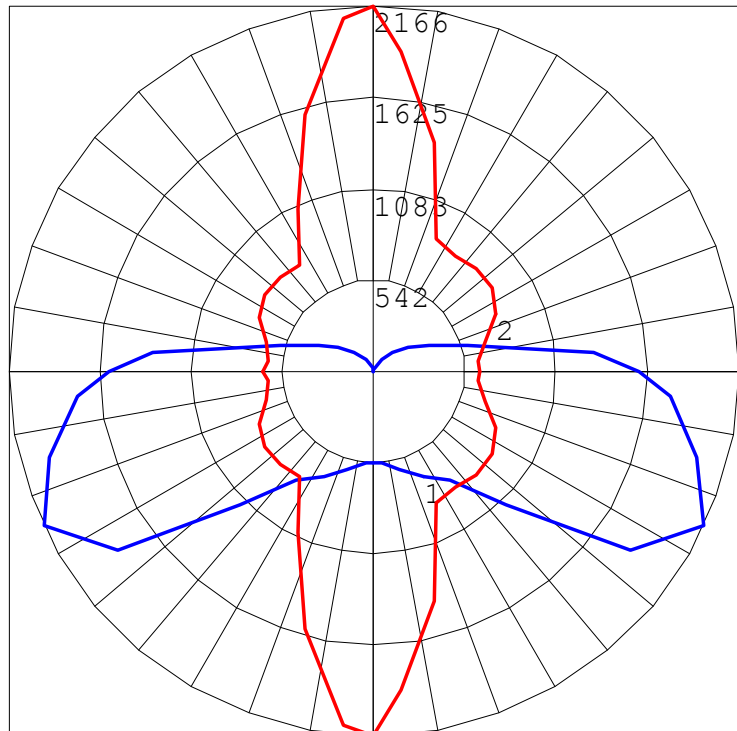



## Photometric Report (Type C)

Filename: HAZ102I.ies

Maximum Candela = 2166 at 90 H 65 V

### Classification:

Road Classification: Type I, Short, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.21

Luminaire Efficacy Rating (LER): 6538

Indoor Classification: Semi-Direct

BUG Rating : B2-U5-G4

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	171.8	2.0	2.6
FM (30-60)	779.7	8.9	11.9
FH (60-80)	946.5	10.8	14.5
FVH (80-90)	634.4	7.2	9.7
BL (0-30)	172.9	2.0	2.6
BM (30-60)	791.2	9.0	12.1
BH (60-80)	971.6	11.0	14.9
BVH (80-90)	668.1	7.6	10.2
UL (90-100)	331.3	3.8	5.1
UH (100-180)	1070.6	12.2	16.4
Total	6538.1	74.5	100.0
BUG Rating	B2-U5-G4		

