



## Photometric Report (Type C)

Filename: HAZ4163.ies

Maximum Candela = 1519.43005371094 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.41

Luminaire Efficacy Rating (LER): 13388

Indoor Classification: General Diffuse

BUG Rating : B3-U5-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

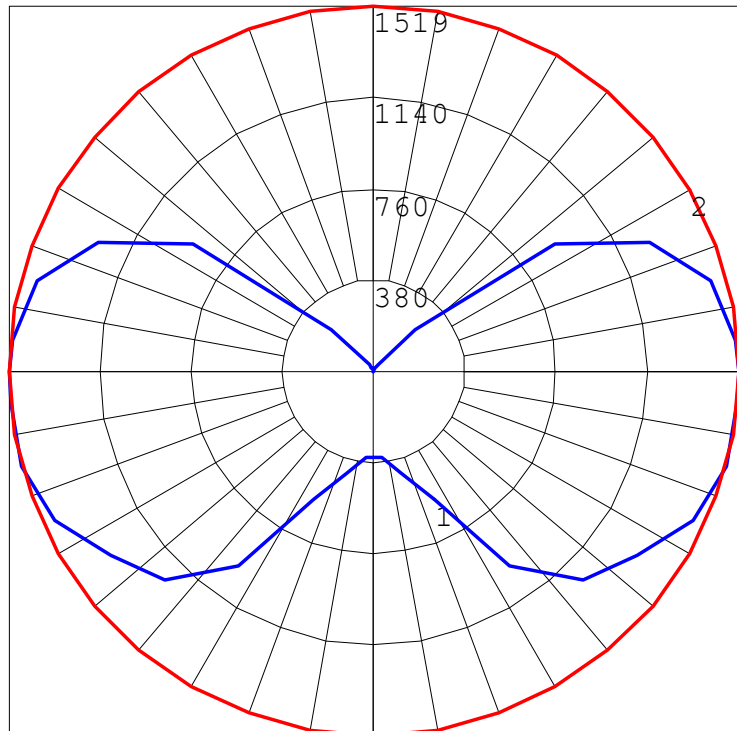



## Photometric Report (Type C)

Filename: HAZ4163.ies

Maximum Candela = 1519.43005371094 at 0 H 75 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.41

Luminaire Efficacy Rating (LER): 13388

Indoor Classification: General Diffuse

BUG Rating : B3-U5-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	138.6	0.9	1.0
FM (30-60)	1148.0	7.2	8.6
FH (60-80)	1434.2	9.0	10.7
FVH (80-90)	1235.5	7.7	9.2
BL (0-30)	138.6	0.9	1.0
BM (30-60)	1148.0	7.2	8.6
BH (60-80)	1434.2	9.0	10.7
BVH (80-90)	1235.5	7.7	9.2
UL (90-100)	830.1	5.2	6.2
UH (100-180)	4644.8	29.0	34.7
Total	13387.5	83.8	100.0
BUG Rating	B3-U5-G5		

