



## Photometric Report (Type C)

Filename: HAZ272I.ies

Maximum Candela = 61 at 0 H 85 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.35

Luminaire Efficacy Rating (LER): 478

Indoor Classification: Semi-Direct

BUG Rating : B0-U3-G1


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 85 Vertical

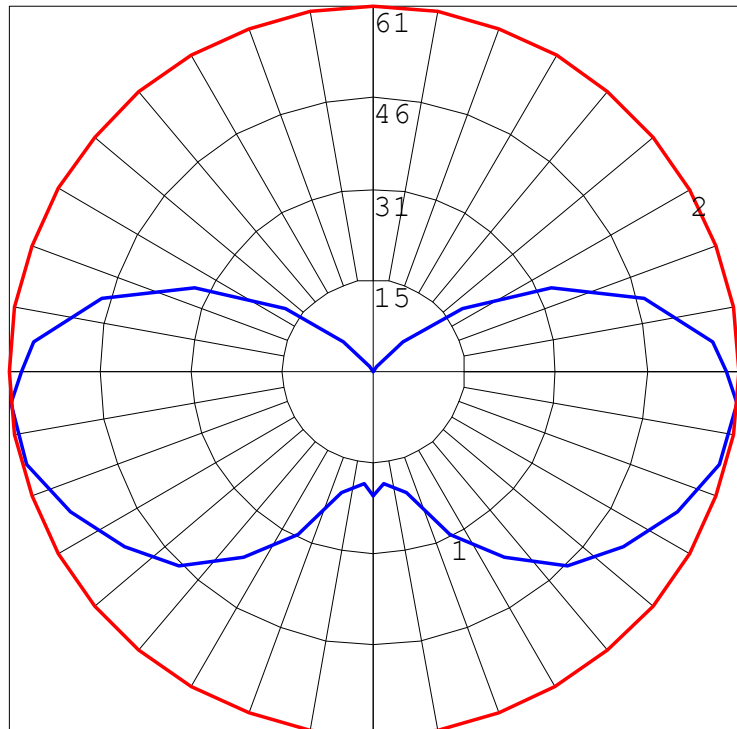



## Photometric Report (Type C)

Filename: HAZ272I.ies

Maximum Candela = 61 at 0 H 85 V

### Classification:

Road Classification: Type V, Long, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.35

Luminaire Efficacy Rating (LER): 478

Indoor Classification: Semi-Direct

BUG Rating : B0-U3-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	6.9	1.2	1.4
FM (30-60)	44.4	7.4	9.3
FH (60-80)	55.2	9.2	11.6
FVH (80-90)	49.1	8.2	10.3
BL (0-30)	6.9	1.2	1.4
BM (30-60)	44.4	7.4	9.3
BH (60-80)	55.2	9.2	11.6
BVH (80-90)	49.1	8.2	10.3
UL (90-100)	31.8	5.3	6.6
UH (100-180)	135.0	22.5	28.2
Total	478.0	79.8	100.0
BUG Rating	B0-U3-G1		

