



## Photometric Report (Type C)

Filename: HAZ277I.ies

Maximum Candela = 93 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Wast Light Ratio: 0.30

Luminaire Efficacy Rating (LER): 683

Indoor Classification: Semi-Direct

BUG Rating : B0-U3-G1


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 75 Vertical

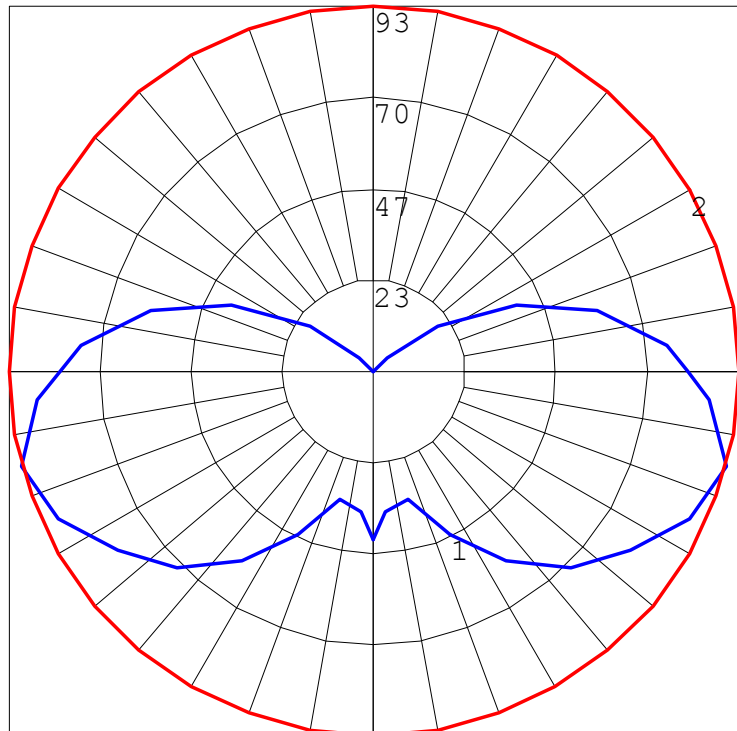



## Photometric Report (Type C)

Filename: HAZ277I.ies

Maximum Candela = 93 at 0 H 75 V

### Classification:

Road Classification: Type V, Medium, Non-Cutoff (deprecated)

Upward Waste Light Ratio: 0.30

Luminaire Efficacy Rating (LER): 683

Indoor Classification: Semi-Direct

BUG Rating : B0-U3-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	11.3	1.3	1.7
FM (30-60)	68.9	7.7	10.1
FH (60-80)	86.9	9.7	12.7
FVH (80-90)	71.0	7.9	10.4
BL (0-30)	11.3	1.3	1.7
BM (30-60)	68.9	7.7	10.1
BH (60-80)	86.9	9.7	12.7
BVH (80-90)	71.0	7.9	10.4
UL (90-100)	42.4	4.7	6.2
UH (100-180)	163.9	18.2	24.0
Total	682.5	76.1	100.0
BUG Rating	B0-U3-G1		

