



## Photometric Report (Type C)

Filename: HAZ312I.ies

Maximum Candela = 375 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 1270

Indoor Classification: Direct

BUG Rating : B1-U0-G1


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

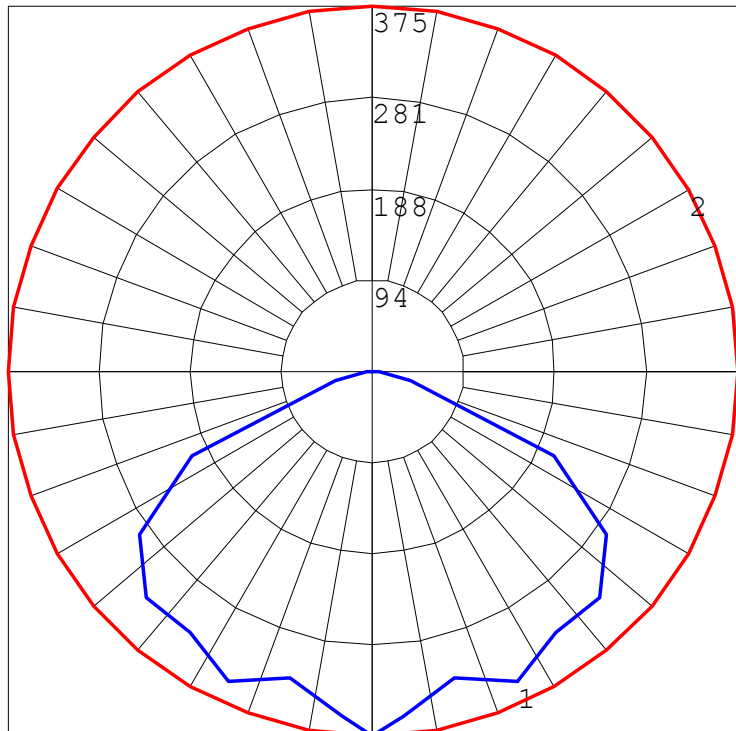



## Photometric Report (Type C)

Filename: HAZ312I.ies

Maximum Candela = 375 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Full Cutoff (deprecated)  
 Upward Waste Light Ratio: 0.00  
 Luminaire Efficacy Rating (LER): 1270  
 Indoor Classification: Direct  
 BUG Rating : B1-U0-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	100.3	5.7	7.9
FM (30-60)	339.8	19.4	26.7
FH (60-80)	181.9	10.4	14.3
FVH (80-90)	13.2	0.8	1.0
BL (0-30)	100.3	5.7	7.9
BM (30-60)	339.8	19.4	26.7
BH (60-80)	181.9	10.4	14.3
BVH (80-90)	13.2	0.8	1.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	1270.4	72.6	100.0
BUG Rating	B1-U0-G1		

