



## Photometric Report (Type C)

Filename: HAZ358I.ies

Maximum Candela = 9250 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.02

Luminaire Efficacy Rating (LER): 38212

Indoor Classification: Direct

BUG Rating : B5-U4-G5


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 0 Vertical

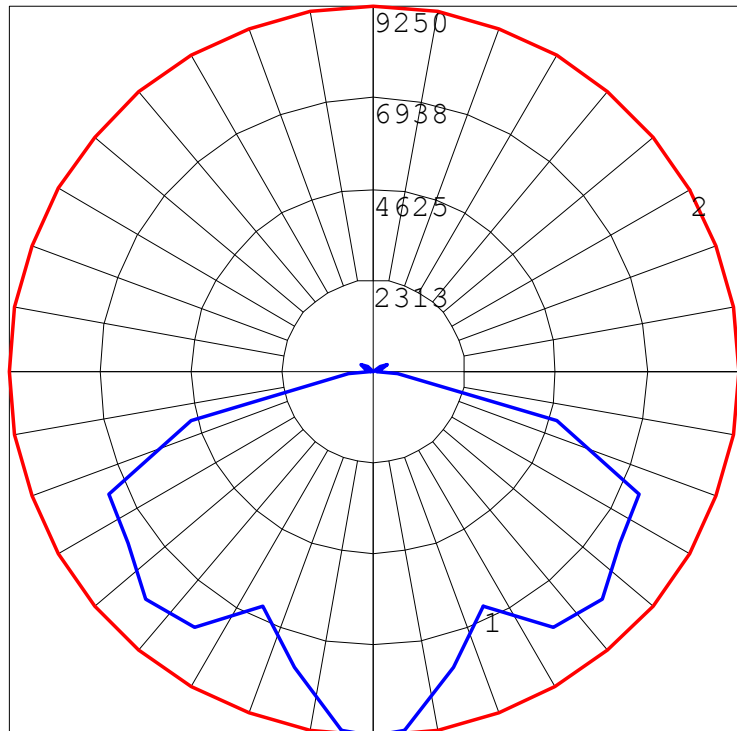



## Photometric Report (Type C)

Filename: HAZ358I.ies

Maximum Candela = 9250 at 0 H 0 V

### Classification:

Road Classification: Type V, Very Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.02

Luminaire Efficacy Rating (LER): 38212

Indoor Classification: Direct

BUG Rating : B5-U4-G5

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2263.0	4.5	5.9
FM (30-60)	8151.2	16.3	21.3
FH (60-80)	6723.8	13.4	17.6
FVH (80-90)	1561.4	3.1	4.1
BL (0-30)	2263.0	4.5	5.9
BM (30-60)	8151.2	16.3	21.3
BH (60-80)	6723.8	13.4	17.6
BVH (80-90)	1561.4	3.1	4.1
UL (90-100)	44.6	0.1	0.1
UH (100-180)	768.2	1.5	2.0
Total	38211.6	76.2	100.0
BUG Rating	B5-U4-G5		

