



## Photometric Report (Type C)

Filename: HAZ412I.ies

Maximum Candela = 702 at 0 H 55 V

### Classification:

Road Classification: Type V, Short, Cutoff (deprecated)

Upward Wast Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 2651

Indoor Classification: Direct

BUG Rating : B1-U1-G1


### Polar Candela Curves:

Vertical Plane Through:

1) 0 - 180 Horizontal

Horizontal Cone Through:

2) 55 Vertical

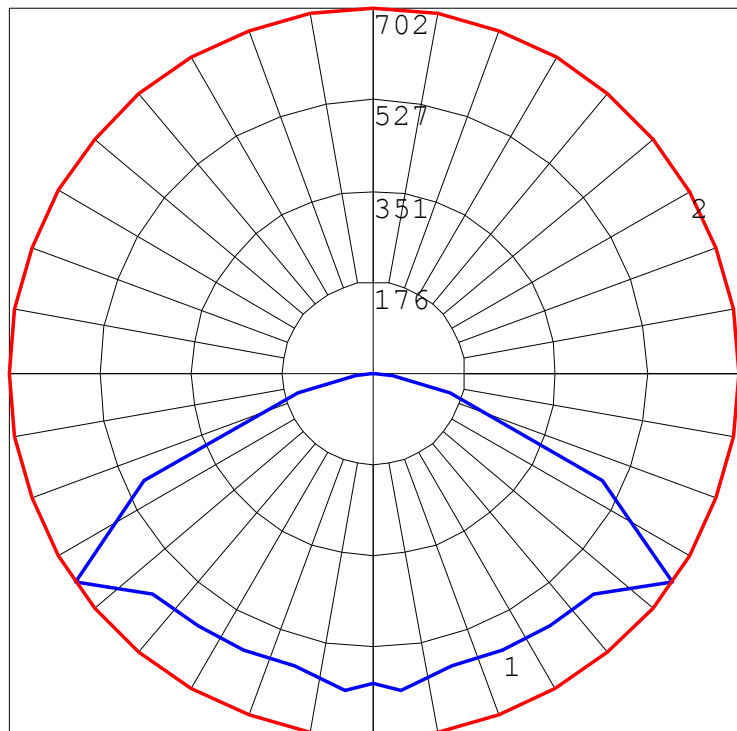



## Photometric Report (Type C)

Filename: HAZ412I.ies

Maximum Candela = 702 at 0 H 55 V

### Classification:

Road Classification: Type V, Short, Cutoff (deprecated)

Upward Waste Light Ratio: 0.00

Luminaire Efficacy Rating (LER): 2651

Indoor Classification: Direct

BUG Rating : B1-U1-G1

### LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	174.3	4.4	6.6
FM (30-60)	645.0	16.1	24.3
FH (60-80)	446.1	11.2	16.8
FVH (80-90)	55.4	1.4	2.1
BL (0-30)	174.3	4.4	6.6
BM (30-60)	645.0	16.1	24.3
BH (60-80)	446.1	11.2	16.8
BVH (80-90)	55.4	1.4	2.1
UL (90-100)	0.0	0.0	0.0
UH (100-180)	9.4	0.2	0.4
Total	2651.0	66.4	100.0
BUG Rating	B1-U1-G1		

