




# LED DOCK ASSEMBLIES

LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments

## Complete Dock Light Assemblies

The all-in-one design of the complete series stands ready for general purpose, wet location, and explosion proof environments. These versatile dock/task lights designed for use in chemical plants, drilling rigs, refineries and any other locations where wet and hazardous chemicals and gases may exist. Constructed of rugged materials and built to withstand the occasional accidental impact, these fixtures are out-of-the-box ready to illuminate your work area.

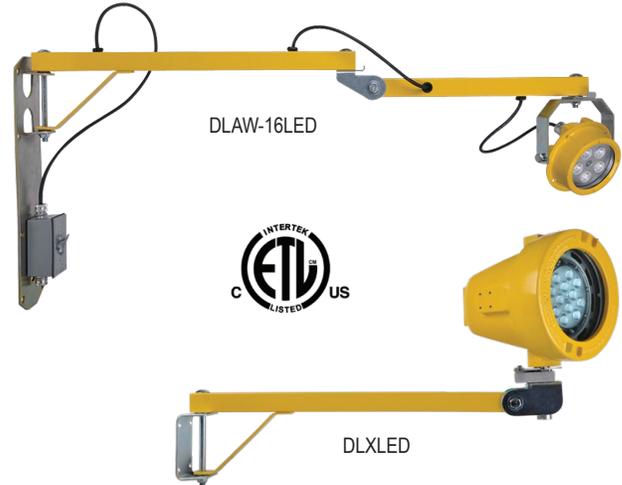

Location	Item #	Arm Length	Source	CCT	Voltage
Explosion Proof	DLXLED-FL	26in. (Rigid)	39W / 2823Lm / 45° Optic (Flood)	5,100K	120VAC (60Hz)
	DLXLED-SP		39W / 2886Lm / 28° Optic (Spot)		
Wet Location	DLAW-16LED-25-42-120	42in. (Rigid)	16W / 789Lm / 25° Optic	6,300K	
	DLAW-16LED-40-42-120		16W / 789Lm / 40° Optic		
	DLAW-16LED-25-60-120	60in. (Rigid)	16W / 789Lm / 25° Optic		
	DLAW-16LED-40-60-120		16W / 789Lm / 40° Optic		
General	DLP-FLEX-LED	43in. (Flexible)	10W / 942Lm	5,000K	

### DLXLED

#### CERTIFICATIONS

UL844 / CSA-C22.2 No.137 (Hazardous)  
 CI D1, Grps C,D  
 CI D2, Grps A,B,C,D  
 CII D1, Grps F,G  
 CII D2, Grps F,G  
 CIII D1, D2  
 T-Code: T6  
 UL1598 / CSA-C22.2 No.250  
 UL1598A (Marine Outside)  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 -20°C to 40°C Ambient  
 NEMA 4X

#### CONSTRUCTION

Copper-free cast aluminum shell and cover  
 1.5" Square steel tubing (Arm)  
 3/4" Tempered glass lens  
 Powder coat safety yellow  
 Zinc plated steel yoke mount (Light head)  
 Weight: 28 lbs.

#### ELECTRICAL

120-277VAC (50/60Hz)  
 Over-voltage, over-current, and short-circuit protection  
 6Ft. wire

#### FEATURES

3 Year Warranty  
 180° horizontal swing  
 Head rotates 230° horizontally and up to 74° vertically

### DLAW-16LED

#### CERTIFICATIONS

UL1598 / CSA-C22.2 No.250 (Wet Locations)  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 5°C to 25°C Ambient  
 CRI>70

#### CONSTRUCTION

Marine-grade, low-copper-aluminum housing  
 1.5" Square steel tubing (Arm)  
 Clear polycarbonate lens  
 Powder coat safety yellow  
 Zinc plated hardware (arm)  
 Stainless steel hardware (light head)  
 Weights: 30 lbs. (42in. arm) / 36 lbs. (60in. arm)

#### ELECTRICAL

120-277VAC (50/60Hz)  
 3 conductor, grounded cord

#### FEATURES

3 Year Warranty  
 180° horizontal swing  
 Head rotates 230° horizontally and up to 74° vertically

### DLP-FLEX-LED

#### CERTIFICATIONS

UL153 (Portable Luminaires)  
 Lumen Maintenance (L70) >50,000 hrs (reported)  
 5°C to 25°C Ambient  
 CRI>70

#### CONSTRUCTION

Polycarbonate polymer (Light head)  
 Flexible tubing (arm)  
 Clear polycarbonate lens  
 Safety yellow (Light head)  
 Zinc plated hardware (arm)  
 Weights: 12 lbs.

#### ELECTRICAL

On/Off 125V 15A rocker switch  
 3 Prong plug (NEMA 5-15)  
 4kV surge protection


#### FEATURES

1 Year Warranty






# LED DOCK

## LOADING DOCK & TASK LIGHTING

Trailer/Cargo Docks • Refineries • Chemical Plants • Explosion Proof Environments



### DIMENSIONS

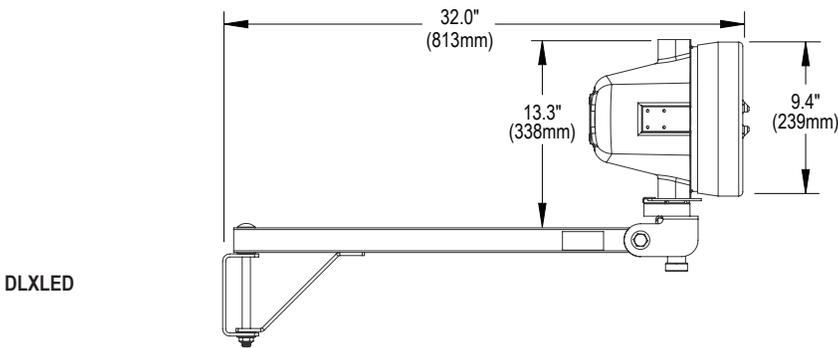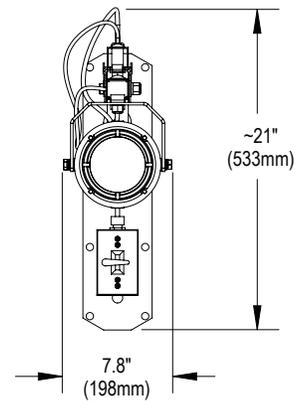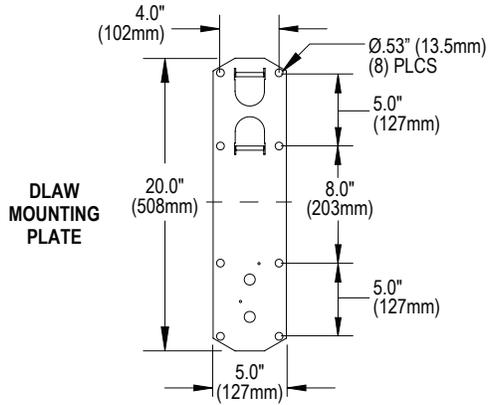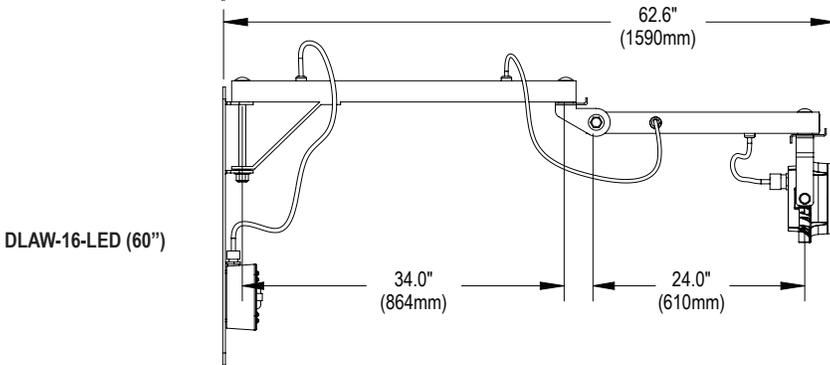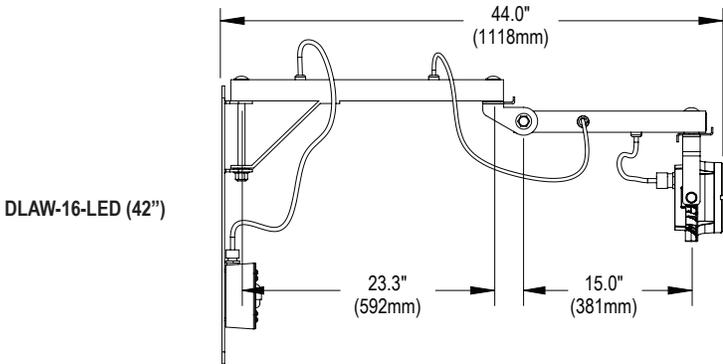

**DLXLED / FLEXLED MOUNTING PLATE**

