

The LEHC Series is a modern day LED jelly jar solution designed to replace traditional incandescent fixtures. This fixture is suitable for marine and hazardous locations. The LEHC features a long lasting housing construction and a low profile lens making it the perfect fit for even the smallest spaces.



LEHC									
1	2	3	4	5	6	7	8	9	10

1 SERIES	2 SOURCE	3 VOLTAGE	4 CCT	5 DIMMING	6 DISTRIBUTION ANGLE
LEHC	L1: 15W L2: 20W	V1: 120-277VAC (50/60Hz)	3: 3,000K 4: 4,000K 5: 5,000K	Blank: None D1: 0-10V Dimming	V120: 120° Angle
7 DIFFUSER TYPE	8 MOUNTING TYPE	9 LED TYPE	10 OPTIONS		
GSF: Short flat glass PSF: Short flat polycarbonate	MC: Ceiling mount MP: Pendant mount MW: 90° wall mount MR: Rotatable wall mount	Blank: Flat SMT board	Blank: No EM battery EM: EM Battery		

CERTIFICATIONS

UL844
CI D2 Groups A,B,C,D
UL1598
UL1598A Marine Outside Type
ABS
IP66
IK08

CONSTRUCTION

Copper-free cast aluminum housing
Tempered glass lens
Polycarbonate lens
Metal Guard

FEATURES


4 Cable Entires
100 Lm/W
CRI >70
Mounting: Ceiling, Pendant, Wall, Adjustable

Ambient Temperature and T-Code Ratings

L1: 15W	-40°C to 40°C	T5
L2: 20W	-40°C to 40°C	T4
L1: 15W (EM)	0°C to 40°C	T5
L2: 15W (EM)	0°C to 40°C	T4

Lumen Output

15W	1,500
20W	2,000

	
Metal Guard: Short	Short: Clear

LEHC


LED HAZARDOUS LIGHTING

Elevator Pits • Man Doors • Power Plants • Storage Facilities • Tunnels

MOUNTING OPTIONS


			
Ceiling Mount (MC)	Pendant Mount (MP)	90° Wall Mount (MW)	Rotatable Wall Mount (MR)

FIELD INSTALLED REFLECTOR (ORDERED SEPARATELY)

	
60° Reflector / Part # LEHC-60	90° Reflector / Part # LEHC-90


DIMENSIONS

Millimeters [Inches]

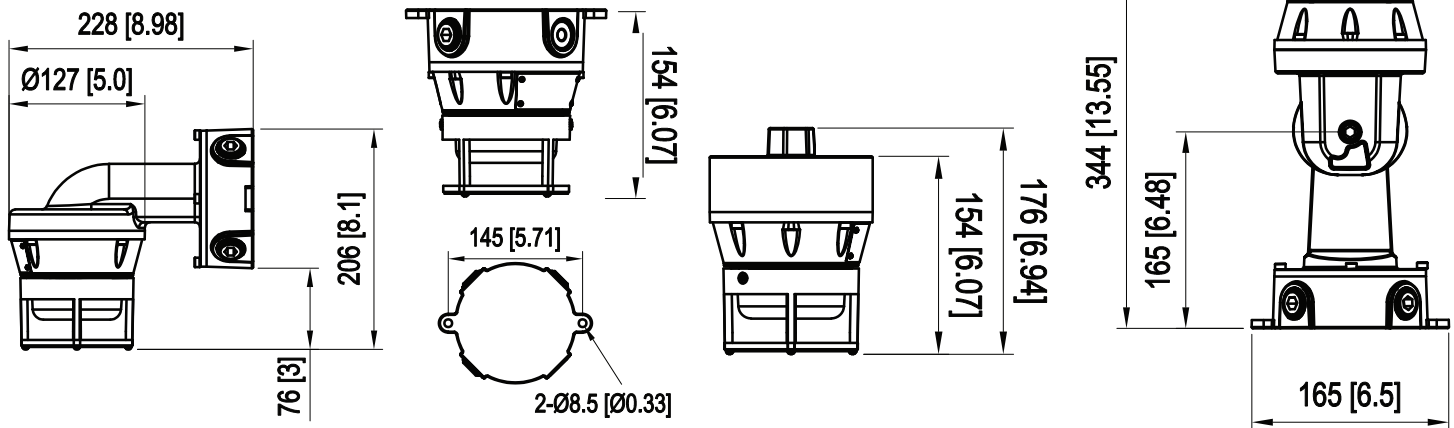

EMERGENCY DIMENSIONS

Millimeters [Inches]

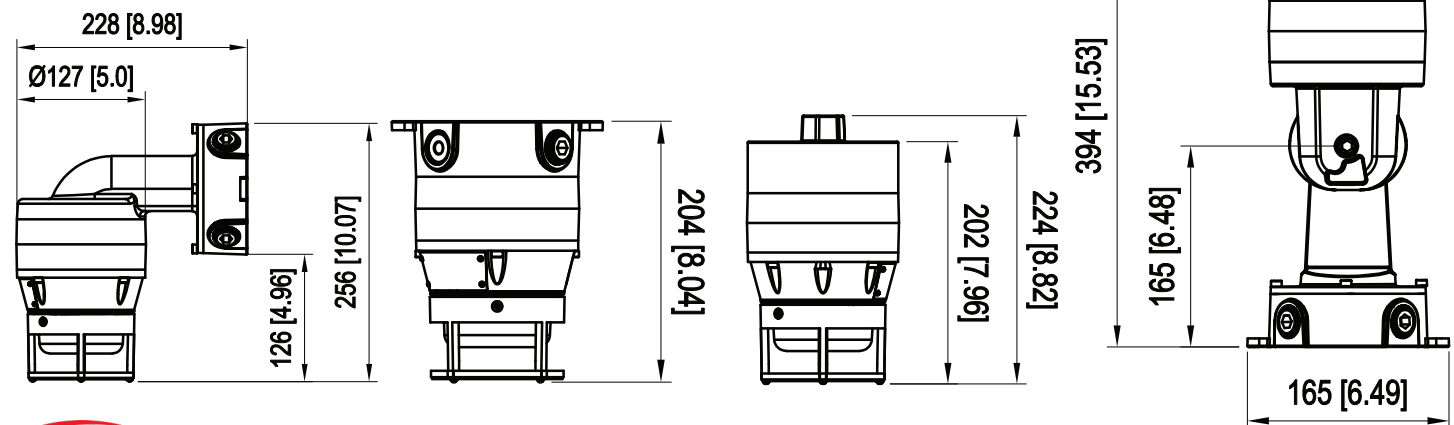

1-800-854-0021 www.ldpi-inc.com
LDPI® is a registered trademark of LDPI, Inc. © LDPI, Inc.

Product design and specifications subject to change without notice.
Visit www.ldpi-inc.com for the most current version and photometric data. v.07.28.25