

## 260-261 LED

## LED HAZARDOUS BOOTH LIGHTING

Paint and Powder Booths • Blast Booths • Prep • Sanding

The 260/261 LED Series is a product designed specifically for Paint Spray Booths. These fixtures can be built with low, standard and high output factor drivers and are available with 5,000K LEDs. The 260 LED Series allows for both front and rear access using a paint spray cutoff switch when the front door frame is opened. The 261 Series is a rear access only fixture and does not require paint spray cutoff. Must be mounted hinge side up. LED lamps and 8 Ft. wire whip included.



Series 260: Front and Rear Access



Series 261: Rear Access Only



1 SERIES	2 SOURCE	3 CCT
260: 4 Lamp Front & Rear Access Fixture 261: 4 Lamp Rear Access Fixture	L: Low Output Factor (64W) S: Standard Output Factor (70W) H: High Output Factor (97W)	<b>5</b> : 5,000K

#### **CERTIFICATIONS**

UL844 / CSA-C22.2 No.137 (Hazardous)

CI D2, Grps A,B,C,D

CII D2, Grps F,G

Paint Spray Listed T Code: CI D2 / CII D2=T3C

UL1598 / CSA-C22.2 No.250 (Wet/Damp)

Lumen Maintenance (L70) >50,000 hrs. (lamps only)

CRI >80

-18°C to 40°C Ambient

### **CONSTRUCTION**

20 gauge white powder coated steel housing Hinged, inside (front) access panel Silicone-free gaskets 4 Ft. length (nominal) Clear tempered glass panel 1/2" NPT Hub Weight: 59 lbs.

## **ELECTRICAL**

120-277VAC

8Ft. 5-wire whip (260 series standard)

8Ft. 3-wire whip (261 series standard)

#### **FEATURES**

260 Series: Front & Rear accessibility 261 Series: Rear accessibility only


40%+ energy savings compared to F32 T8 fluorescent lamps

Panel stiffener kit for 18ga. booth panels (#1704)

5 year warranty

#### **PERFORMANCE**

		Voltage (VAC)	Input Current	Wattage (W)	Lumen Output* (Lm)
SERIES	Source	50/60Hz	(A)		5,000K
390260-LED	L	- 120-277	.5423	64	5860
	S		.5926	70	6500
	Н		.8235	97	8400
390261-LED	L		.5423	64	5860
	S		.5926	70	6500
	Н		.8235	97	8400
					* Nominal values



## \*NOTE

Normally open magnetic switches are intended to be used to trigger a relay (furnished by others) which disables the paint system. Because of the small capacity of the switch a solid state relay is recommended. It may be desired by others to utilize a separate power supply to segregate the relay (furnished by others) from the lighting power supply. The magnetic switch IS NOT designed to directly control light operation! The magnetic switch is rated for 10 watts resistive at a maximum of 300 VAC.



#### CAUTION

Overloading the switch circuits WILL cause failure. LDPI, Inc. recommends having a certified electrician/engineer review loads to ensure that overloading of switch does not occur.



# 260-261 LED

## LED HAZARDOUS BOOTH LIGHTING


Paint and Powder Booths • Blast Booths • Prep • Sanding





## **DIMENSIONS (NOMINAL)**

390260-LED Shown. Dimensions are the same for 390261-LED.

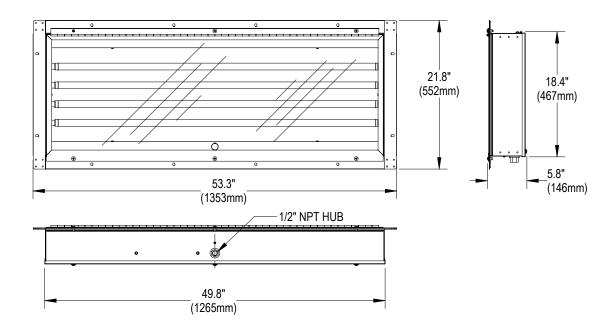

#### PANEL CUTOUT DIMENSIONS (ACTUAL)

