



# LE121

## ORDINARY LOCATIONS

Warehouses • Aisle Lighting • Task/Assembly • Commercial • Medical • Institutions/Schools

The LE121 fixture is a Linear High Bay premium fixture with **directional LED** elements to adjust and focus the lumen output directly on task areas. Highly customizable to provide the desired lumen output, color temperature, directional and controllable to suit any general application.



1 SERIES	2 POWER	3 LENGTH	4 ROWS	5 VOLTAGE	6 DIMMING
LE121	P16 P22	4: 4 Ft. 6: 6 Ft. 8: 8 Ft.	2: 2 Row 3: 3 Row 4: 4 Row	V1: 120-277V V2: 347V	BLANK: No Dimming D1: 0-10V (Std.) D2: DALI D3: Use with OC
7 CORD	8 LENS	9 CCT	10 FINISH	11 OPTIONS	NOTES
BLANK: No Cord C1: Blunt End C2: 120V Plug C3: 277V Plug	D: Diffuser P: Polycarbonate A: Acrylic	3: 3500K 4: 4000K 5: 5000K	PW: Powder Coat White PB: Powder Coat Black	OC: Programmable Sensor CB: Cable Mount CM: Ceiling Mount WG: Wire Guard EM: Battery/Driver Backup (90 Min.)	*OC: Occupancy Sensor is factory pre-set for 100% output when turned on. The fixture will automatically dim to 10% output with no motion in 5 minutes; no motion after 60 minutes, the fixture turns off. Occupancy sensor operation can be field adjusted with programming remote, (item# 14539) sold separately.

### CERTIFICATIONS

UL1598  
CSA 22.2 No. 250.0  
UL8750  
CSA 22.2 No. 250.13  
-40°C to 50°C Ambient Rating

### CONSTRUCTION

18Ga. Steel White Powder Coat  
Extruded Aluminum Housing

### PERFORMANCE

See Chart

### ELECTRICAL

120-277 Volts, 50/60Hz  
347 Volts, 50/60Hz

### OPTIONS

Dimming  
Occupancy Sensor  
Emergency Driver  
Fixture Color  
Wire Guard  
6' Cord with Plug



# LE121

## ORDINARY LOCATIONS

Warehouses • Aisle Lighting • Task/Assembly • Commercial • Medical • Institutions/Schools



### PERFORMANCE



Performance: Lumen Output Per Fixture Configuration

	Power	4 Ft.		6 Ft.		8 Ft.	
		Watts	Lumens	Watts	Lumens	Watts	Lumens
2 Row	P16	128	13710	192	20565	256	27420
	P22	182	18700	273	28050	364	37400
3 Row	P16	192	20565	288	30848	384	41130
	P22	273	28000	410	42000	546	56000
4 Row	P16	256	27420	384	41130	512	54840
	P22	364	37400	546	56100	728	74800

Lumen values shown for Polycarbonate (LP) clear lens



### DIMENSIONS

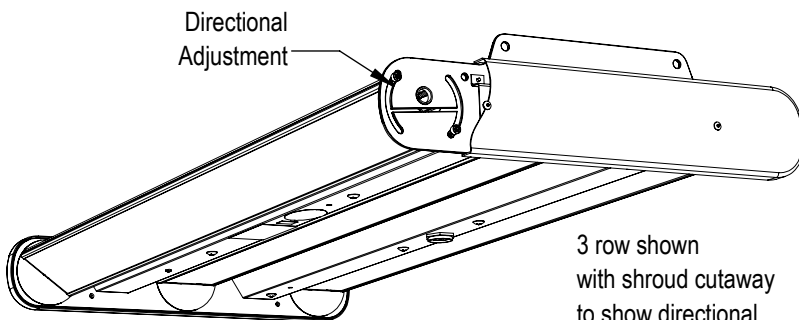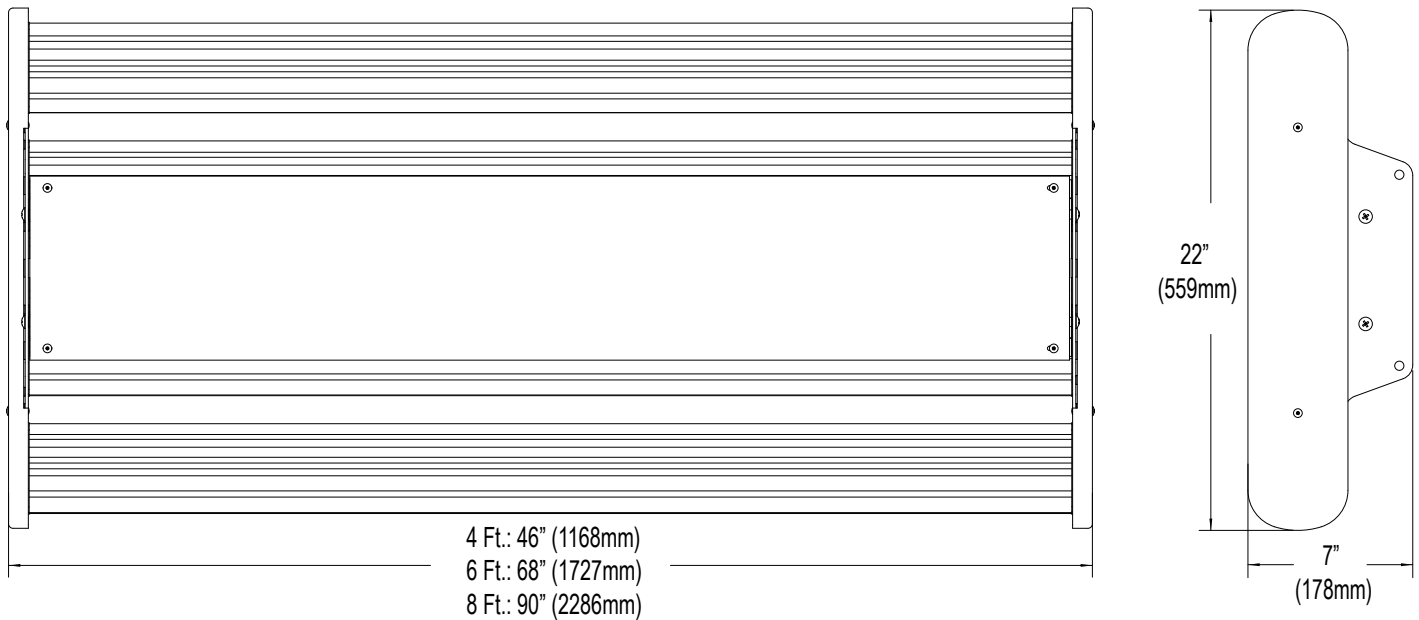

3 row shown with shroud cutaway to show directional feature.

