




Quick Disconnect Plug and Socket with Strain Relief Housing
Available in lengths from 10 Ft. to 100 Ft.

End #1: Plug with strain relief housing
End #2: Socket with strain relief housing

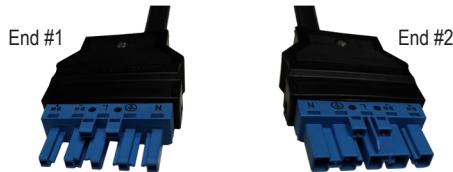


END #1	PART ID	LENGTH	END #2
Plug with strain relief housing 	15975	10 Ft.	Socket with strain relief housing 
	16281	15 Ft.	
	15926	25 Ft.	
	15977	50 Ft.	
	15988	100 Ft.	

TECHNICAL DETAILS

Cable Type	PLTC-ER 90 Deg C 300 Volt
Gauge/Conductors	12/3c (65/30 BC) and 16/2c (65/34 BC)
12 awg Insulation	20 mils PVC insulation (Black, White, Green)
16 awg Insulation	15 mils PVC insulation (Purple, Gray)
Filler	Poly filler down center of cable
Separator	Tissue Separator
Jacket Thickness	50 mils black jacket (PVC)
Outer Diameter	0.450 inches (11.43mm) +/- 0.010" projected diameter
Approvals	UL Listed, RoHS compliant to EU Directive 2011/65/EU

WIRING

- N = White
- L = Black
-  = Green
- DA- = Gray
- DA+ = Purple

